


1W isolated DC-DC converter
Wide input and regulated single output

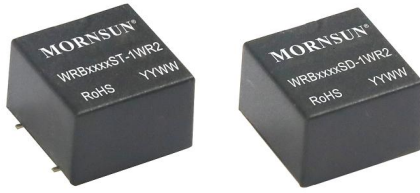

Patent Protection **RoHS**

FEATURES

- Ultra compact DIP/SMD package
- Wide 2:1 input voltage range
- Operating ambient temperature range: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- I/O isolation test voltage: 1.5K VDC
- Short circuit protection (continuous)
- Industry standard pin-out
- Meets EN62368, UL62368 standards

WRB_ST/SD-1WR2 series of isolated 1W DC-DC converter products with a 2:1 input voltage range. The product has a ultra-compact DIP/SMD package, operating temperature of -40°C to $+85^{\circ}\text{C}$ and continuous short circuit protection. The ultra-small volume design makes the converters an ideal solution for communications, instrumentation and industrial electronics applications.

Selection Guide

Certification	Part No.	Input Voltage (VDC)		Output		Ripple & Noise® (mVp-p) Typ./Max.	Full Load Efficiency (%) Min./Typ.	Max. Capacitive Load(μF)
		Nominal (Range)	Max. ①	Voltage(VDC)	Current (mA) Max./Min.			
-	WRB1203ST/SD-1WR2	12 (9-18)	20	3.3	303/15	100/150	73/75	2700
	WRB1205ST/SD-1WR2			5	200/10		75/77	2200
	WRB1212ST/SD-1WR2			12	83/4		77/79	1000
	WRB1215ST/SD-1WR2			15	67/3		78/80	680
	WRB1224ST/SD-1WR2			24	42/2		74/76	470
	WRB2403ST/SD-1WR2	24 (18-36)	40	3.3	303/15	50/100	73/75	2700
	WRB2405ST/SD-1WR2			5	200/10		75/77	2200
	WRB2412ST/SD-1WR2			12	83/4		76/78	1000
	WRB2415ST/SD-1WR2			15	67/3		76/78	680
	WRB2424ST/SD-1WR2			24	42/2		75/77	470

Notes: ① Exceeding the maximum input voltage may cause permanent damage;

② Ripple & noise testing condition at nominal input voltage and 5%-100% load, the "tip and barrel" method is used for ripple and noise test, please refer to DC-DC Converter Application Notes for specific information.

Input Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Input Current (full load/no-load)	12VDC input voltage	--	111/15	114/30	mA
	24VDC input voltage	--	55/6	57/10	
Reflected Ripple Current	12VDC input voltage	--	40	--	mA
	24VDC input voltage	--	55	--	
Surge Voltage (1sec. max.)	12VDC input voltage	-0.7	--	25	VDC
	24VDC input voltage	-0.7	--	50	
Start-up Voltage	12VDC input voltage	--	--	9	VDC
	24VDC input voltage	--	--	18	
Input Filter		Capacitance filter			
Hot Plug		Unavailable			

Output Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Voltage Accuracy	5%-100% load, input voltage range	--	±1	±3	%
No-load Output Voltage Accuracy	Input voltage range	3.3VDC output	±5	±7	
		Others	±1.5	±5	
Linear Regulation	Input voltage variation from low to high at full load	--	±0.2	±0.5	

Load Regulation	5%-100% load	--	±0.5	±1	%
Transient Recovery Time	25% load step change	--	1	3	ms
Transient Response Deviation		--	±2.5	±5	%
Temperature Coefficient	Full load	--	--	±0.03	%/°C
Short-circuit Protection		Continuous, self-recovery			

General Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Isolation	Input-output Electric Strength test for 1 minute with a leakage current of 1mA max.	1500	--	--	VDC
Insulation Resistance	Input-output insulation at 500VDC	1000	--	--	MΩ
Isolation Capacitance	Input-output capacitance at 100KHz/0.1V	--	100	--	pF
Operating Temperature	See Fig. 1	-40	--	+85	°C
Storage Temperature		-55	--	+125	°C
Pin Soldering Resistance Temperature	Soldering spot is 1.5mm away from case for 10 seconds	--	--	+300	
Reflow Soldering Temperature		Peak temperature ≤245°C, duration ≤60s max. over 217°C, see also IPC/JEDEC J-STD-020D.1.			
Storage Humidity	Non-condensing	--	--	95	%RH
Switching Frequency (PFM Mode)	Full load, nominal input voltage	--	300	--	KHz
MTBF	MIL-HDBK-217F@25°C	1000	--	--	K hours


Mechanical Specifications





Case Material	Black flame-retardant and heat-resistant plastic				
Dimension	WRB_SD-1WR2	14.00 x 14.00 x 9.00 mm			
	WRB_ST-1WR2	15.00 x 14.00 x 9.10 mm			
Weight	2.2g(Typ.)				
Cooling Method	Free air convection				

Electromagnetic Compatibility (EMC)

Emissions	CE	CISPR32/EN55032 CLASS B (see Fig. 3-② for recommended circuit)			
	RE	CISPR32/EN55032 CLASS B (see Fig. 3-② for recommended circuit)			
Immunity	ESD	IEC/EN61000-4-2	Contact ±6KV		perf. Criteria B
	RS	IEC/EN61000-4-3	10V/m		perf. Criteria A
	EFT	IEC/EN61000-4-4	±2KV (see Fig. 3-① for recommended circuit)		perf. Criteria B
	Surge	IEC/EN61000-4-5	line to line ±2KV (see Fig. 3-① for recommended circuit)		perf. Criteria B
	CS	IEC/EN61000-4-6	3 Vr.m.s		perf. Criteria A

Product Characteristic Curve

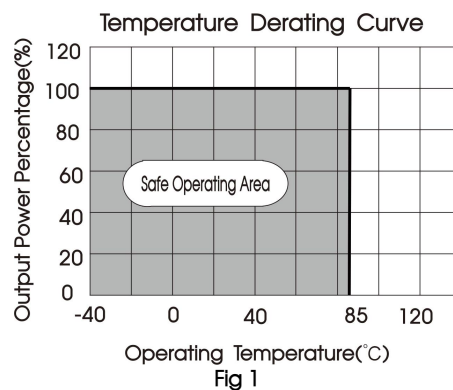


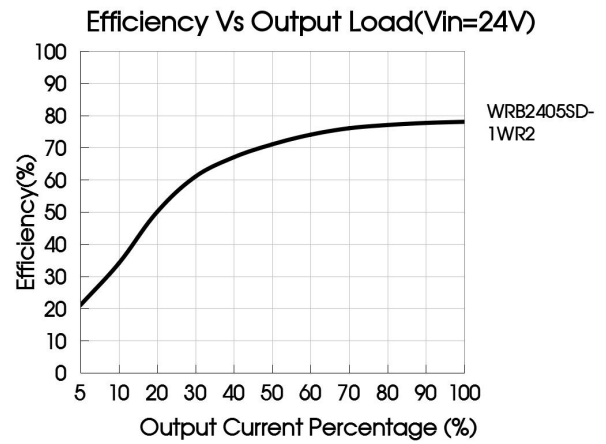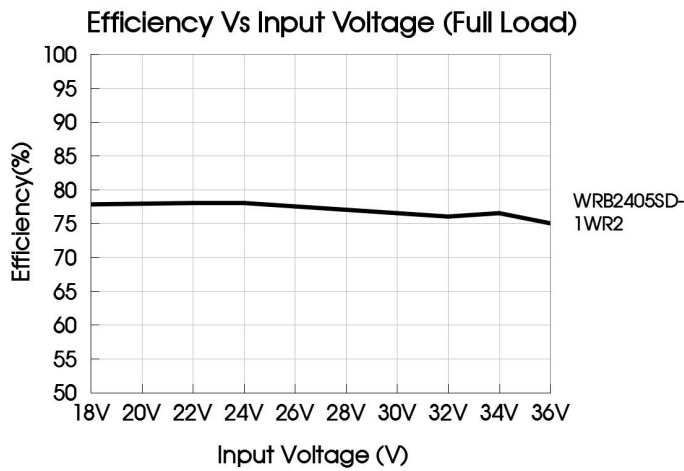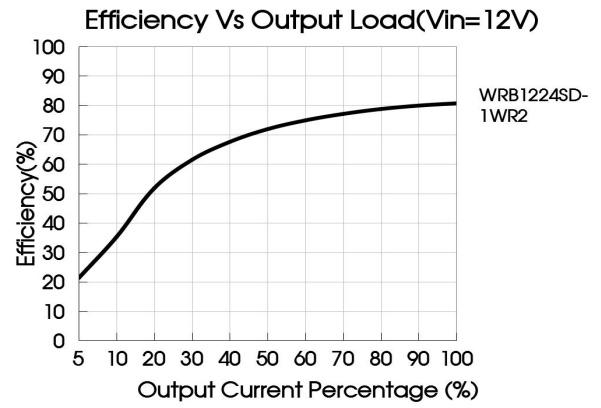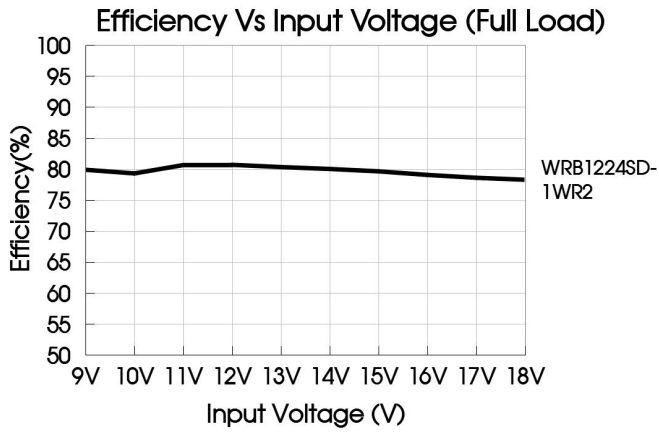

Design Reference

1. Recommended circuit


All the DC/DC converters of this series are tested before delivery using the recommended circuit shown in Fig. 2. Input and/or output ripple can be further reduced by appropriately increasing the input & output capacitor values C_{in} and C_{out} , connecting a "Y" capacitor between input "GND" and output "0V", and/or by selecting capacitors with a low ESR (equivalent series resistance). Also make sure that the capacitance is not exceeding the max. capacitive load value of the product.

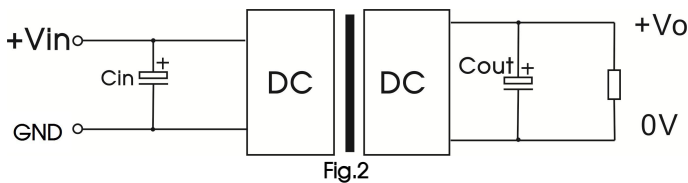

V_{in} (VDC)	12	24
C_{in}	47 μ F/25V	47 μ F/50V

V_o (VDC)	3.3, 5	12, 15, 24
C_{out}	100 μ F/6.3V	27 μ F/35V

2. EMC compliance circuit

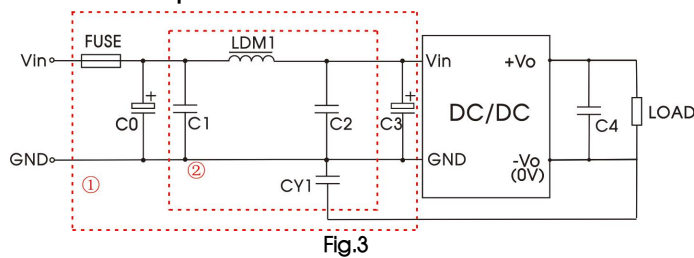

Parameter description:

Part No.	V_{in} :12VDC	V_{in} :24VDC
FUSE	slow blow, choose according to actual input current	
C0	1000 μ F/25V	680 μ F/50V
C1	4.7 μ F/50V	
LDM1	15 μ H	
C2	4.7 μ F/50V	
C3	330 μ F/50V	
CY1	1nF/2KV	
C4	Refer to the C_{out} Fig.2	

Notes: For EMC tests we use Part ① in Fig. 3 for immunity and part ② for emissions test.

3. Input current

When the electricity is provided by the unstable power supply, please make sure that the range of the output voltage fluctuation and the ripple voltage of the power supply do not exceed the indicators of the modules. Input current of power supply should afford the flash startup current of this kind of DC/DC module(see Fig. 4).

Generally: Vin=12V series Iave =205mA
Vin=24V series Iave =104mA




Fig. 4

4. Output load requirements



When using, the minimum load of the module output should not be less than 5% of the nominal load. In order to meet the performance parameters of this datasheet, please connect a 5% dummy load in parallel at the output end, the dummy load is generally a resistor, please note that the resistor needs to be used in derating.

5. For additional information please refer to DC-DC converter application notes on www.mornsun-power.com

Dimensions and Recommended Layout

WRB_SD-1WR2 series

THIRD ANGLE PROJECTION

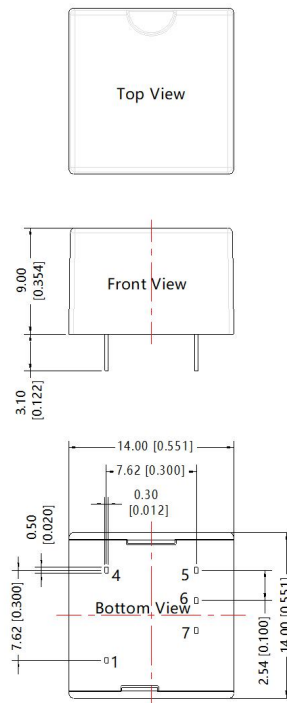



Note: Grid 2.54*2.54mm

Pin-Out	
Pin	Function
1	GND
4	Vin
5	+Vo
6	NC
7	0V

Note:
Unit: mm[inch]
Pin diameter tolerances: $\pm 0.10[\pm 0.004]$
General tolerances: $\pm 0.50[\pm 0.020]$

WRB_ST-1WR2 series

THIRD ANGLE PROJECTION 

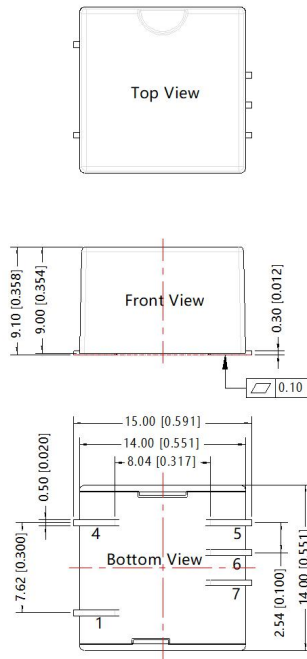

Note: Grid 2.54*2.54mm

Pin-Out	
Pin	Function
1	GND
4	Vin
5	+Vo
6	NC
7	0V

Note:
Unit: mm[inch]
Pin diameter tolerances: $\pm 0.10[\pm 0.004]$
General tolerances: $\pm 0.50[\pm 0.020]$

Notes:

1. For additional information on Product Packaging please refer to www.mornsun-power.com. Packaging bag number: 58210095, Roll packaging bag number: 58210094;
2. Recommend to use module with more than 5% load, if not, the ripple of the product may exceeds the specification, but does not affect the reliability of the product;
3. The maximum capacitive load offered were tested at input voltage range and full load;
4. Unless otherwise specified, data in this datasheet should be tested under the conditions of $T_a=25^\circ\text{C}$, humidity<75%RH with nominal input voltage and rated load;
5. All index testing methods in this datasheet are based on company corporate standards;
6. We can provide product customization service, please contact our technicians directly for specific information;
7. Products are related to laws and regulations: see "Features" and "EMC";
8. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

MORNSUN Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Huangpu District, Guangzhou, P. R. China
Tel: 86-20-38601850 Fax: 86-20-38601272 E-mail: info@mornsun.cn www.mornsun-power.com